PRODUCT DATASHEET
DULUX T/E 32 W/840 GX24Q

OSRAM DULUX® T/E PLUS | CFLni, 3 tubes, with 4-pin base for ECG operation

Areas of application

– Offices, public buildings
– Shops
– Supermarkets and department stores
– Hotels, restaurants
– Industrial lighting

Product benefits

– Improved maintenance

Product features

– Good color rendering index
– Dimmable (3…100 %)
– Short and compact pin-base lamp with triple-turn tubes
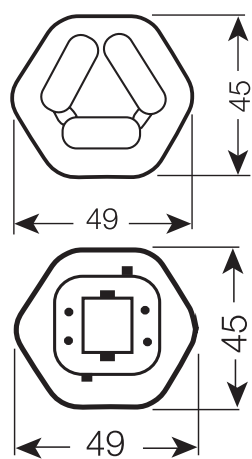– Single-ended four-pin plug-in GX24q base with shortened base casing

TECHNICAL DATA

Electrical data

Nominal wattage	32 W
Construction wattage	32.00 W
Nominal voltage	100 V
Nominal current	320 mA

Photometrical data

Luminous flux	2400 lm
Light color (designation)	Cool White
Color temperature	4000 K
Color rendering index Ra	≥80
Light color	840

Dimensions & Weight

Overall length	146.00 mm
Diameter	12.00 mm
Product weight	63.00 g

Additional product data

Base (standard designation)	GX24q-3
Mercury content	1.7 mg

Country-specific categorizations

Order reference	DULUX T/E 32W/8

Energy labelling regulation data acc EU 2019/2015

Light source cap-type (or other electric interface)	GX24q-3
Length	148.00 mm
Height	12.00 mm
Width	12.00 mm

EQUIPMENT / ACCESSORIES

– Suitable for operation on electronic control gear

Safety advice

– In case of lamp breakage: www.ledvance.com/brokenlamp

DOWNLOAD DATA

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300815848	Folding box 1	45 mm x 48 mm x 152 mm	84.00 g	0.33 dm³
4050300815855	Shipping box 50	504 mm x 239 mm x 167 mm	4612.00 g	20.12 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.